





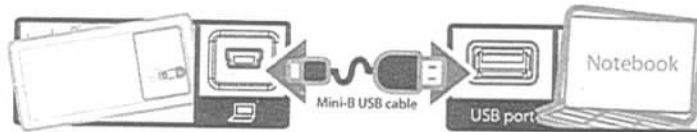
TAADS1000 Quick Installation Guide

You can find the detail installation/operating manual file in bundled CD

1. Outline Description

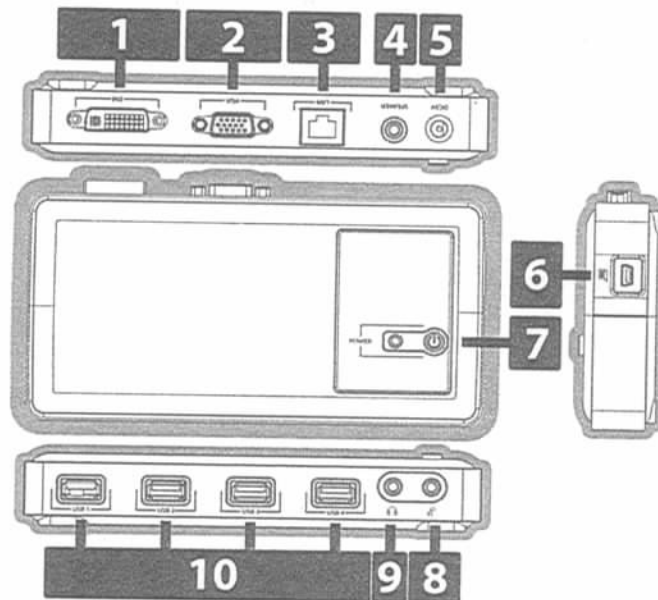

1. **DVI:** DVI output; Connect to monitor with DVI port.
2. **VGA:** VGA output; Connect to monitor with VGA port.
3. **LAN:** Connect network cable.
4. **SPEAKER:** Connect to speaker.
5. **DC5V:** Power in.
6.  : Connects "TAADS1000" and notebook with Mini-B USB cable.
7. **POWER:** Power **ON** (push) **OFF** (release).
8.  : Microphone input.
9.  : Connect to external speaker / headphone.
10. **USB:** USB port



※ Do **not** connect **TAADS1000** to computer USB port before driver installation.




2. Driver Installation



- 2.1 Please insert "**Multimedia Installation Kit**" CD-ROM into your CD-ROM drive; AutoRun will running. (if AutoRun didn't run, please go to "**My Computer**", click CD-ROM drive)
- 2.2 Please select "**Device Driver**"
- 2.3 Follow instructions to finish installation.
- 2.4 Please restart computer.

3. Hardware Installation

(The external device you plug in which depend on your requirement.)

- 3.1 Properly connect monitor to **VGA / DVI (TAADS1000)** output port.
- 3.2 Connect network cable to "**LAN**" (**TAADS1000**).

- 3.3 Connect external speaker to “**SPEAKER**” (TAADS1000).
- 3.4 Connect microphone and headphone to “  ” and “  ” (TAADS1000).
- 3.5 Connect USB keyboard/mouse and other USB devices to **TAADS1000** “**USB**” port.
- 3.6 Connect power adapter to “**DC5V**” (TAADS1000) power port.
- 3.7 Connect Mini-B USB cable between **TAADS1000** and Notebook/desktop computer.
- 3.8 Power on **TAADS1000** device.
- 3.9 After power on, Please check the Device Manager, **TAADS1000** driver is installed successful in your computer.
- 3.10 After the driver is installed correctly, you should now see the following icon  on your notification area.

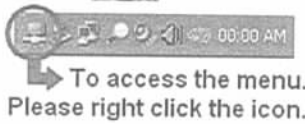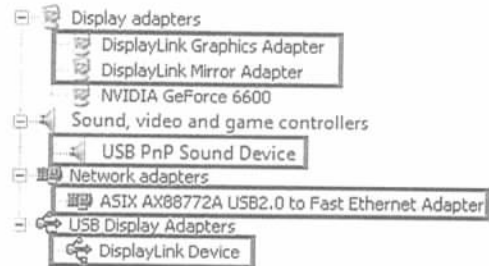

4. Operation

4.1 Starting:

Right click the icon on notification area. You can change the settings and resolution of your **TAADS1000**

4.2 Updates:

Check and download the latest driver here.

4.3 Screen Resolution:

In Set as Main Monitor and Extended mode, you can change the display resolution

4.4 Color Quality:

There are Medium (16-bit) and Highest (32-bit) can select.

4.5 Screen Rotation:



You can use the Rotation function to change the display degree.

4.6 Extend To:

You can extend screen to Right / Left / Above / Below.

4.7 Extend:

This setting will extend your desktop from your main display onto the secondary.

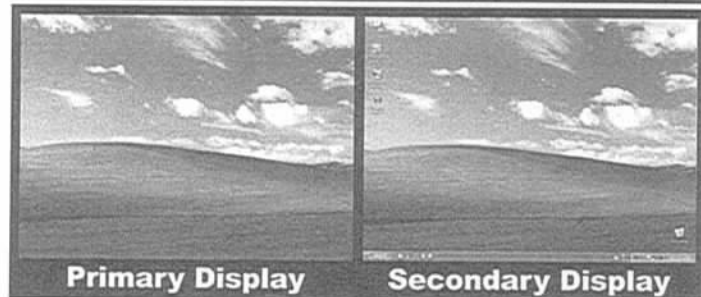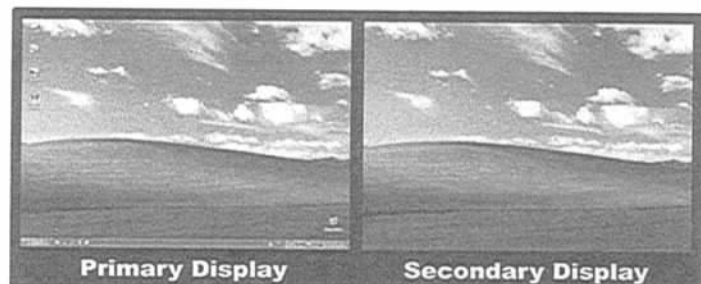


4.8 Set as Main Monitor:

Your main display (monitor) will automatically switch to being the secondary display and show the extended desktop.


4.9 Notebook Monitor Off:

Disable main screen.

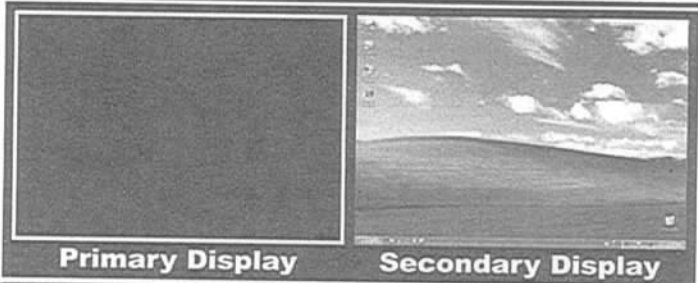


4.10 Mirror:

This setting will mirror the image from your main display onto the secondary display. Your main display and the extended display will show the same image.

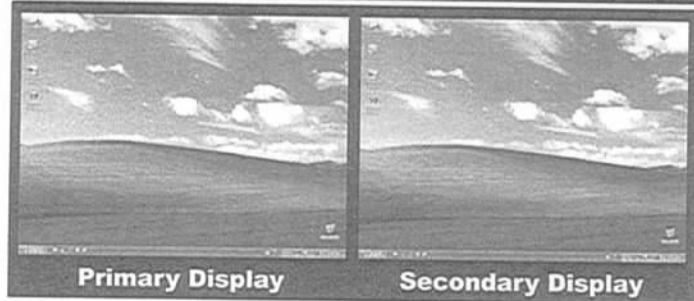

Note: In the Mirror mode, Screen Resolution and Color Quality functions will be disabled. Those two functions depend on the primary screen display settings, you can go to Advanced->Display to change.

4.11 Off: Disable screen extend function.

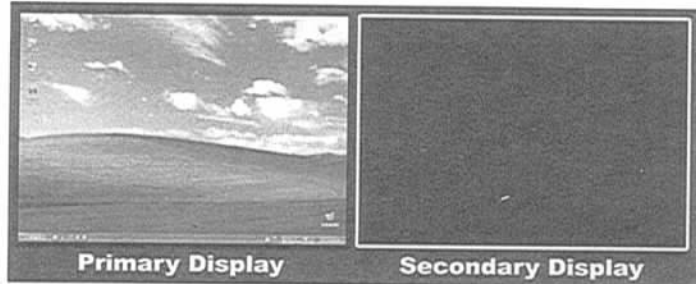

4.12 Optimize for Video (Only in Windows Vista):

Optimize for the video you are showing. The function only can be used in Windows Vista.

4.13 Advanced...: Go to Windows operating system Display Properties

5. Operation (Windows 7)

5.1 Starting:

To access the menu, click the icon on your notification area. This utility allows you to quickly change the settings of your **TAADS1000**.

5.2 Check for Updates...:

Check and download the latest driver automatically here.

5.3 Optimize for Video:


Optimize for the video you are showing.

5.4 Advanced...:

Change the appearance of your displays.

1. **Display:** Display detected information.


2. **Resolution:** You can change the display resolution.

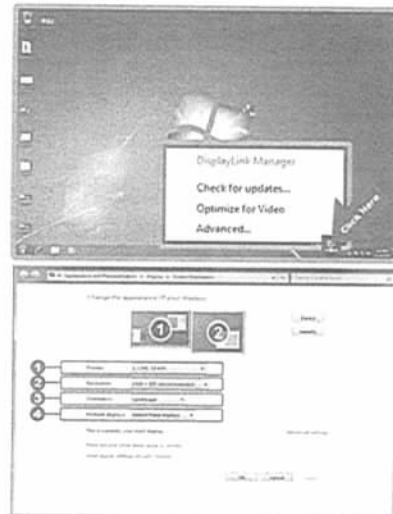

3. Orientation:


You can use this function to change the display Orientation you are selected.

Select a monitor then select a Orientation

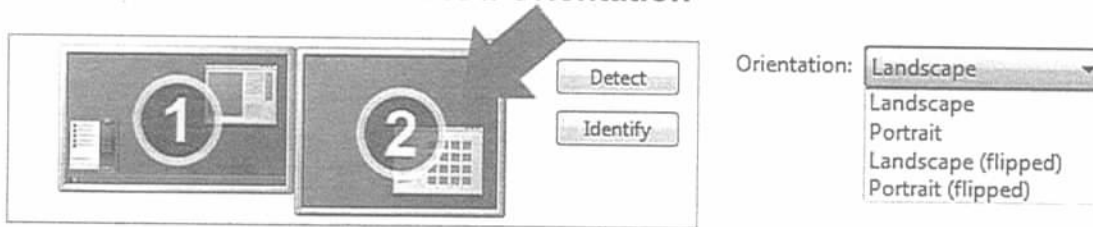


4. Multiple displays:

Multiple displays:

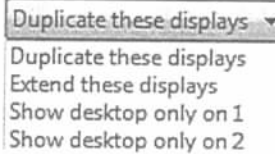


Duplicate these displays:

This setting will **duplicate** the image from your main display onto the secondary display. Your main display and the extended display will show the same image.

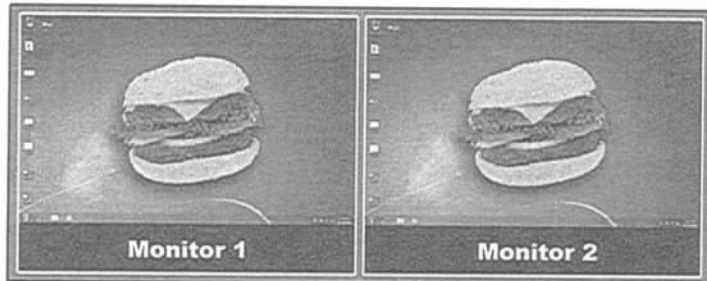


Extend these displays:

This setting will extend your desktop from your main display onto the secondary.

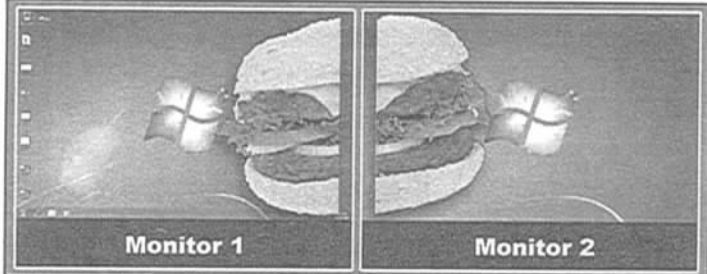


Show desktop only on 1:

Disable monitor 2

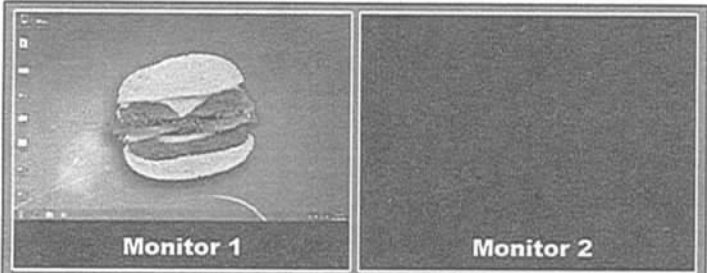

Show desktop only on 2:

Disable monitor 1

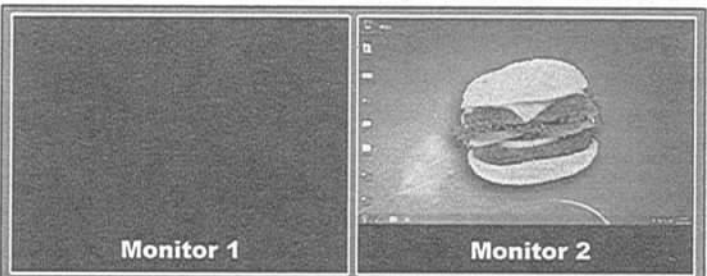

Note:

After the setting please remember to click "Apply" and "OK" before you quit.